PUREDESIGN BY ARWEI®

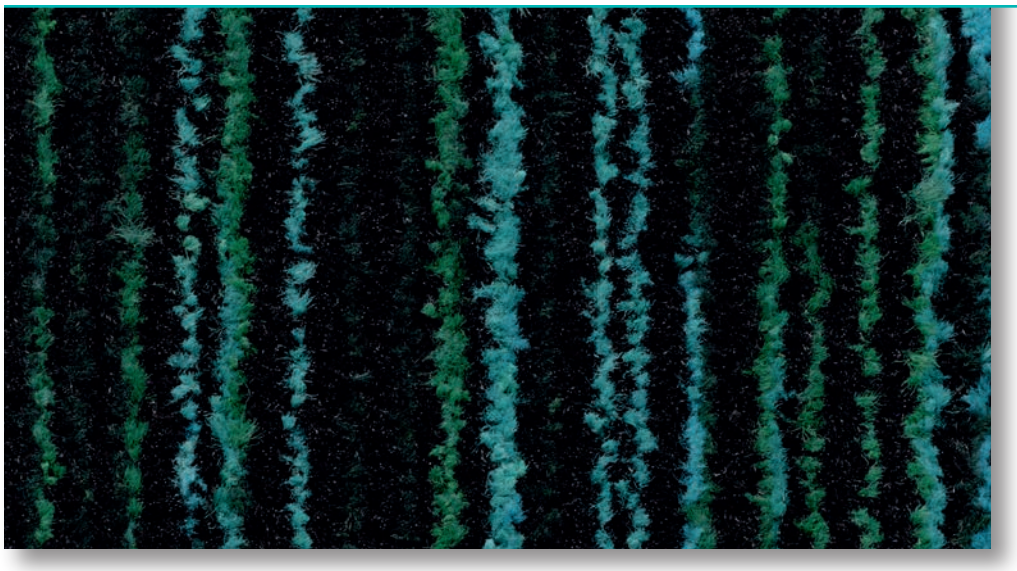

ARWEI SAUBERLAUF
CORAL WELCOME

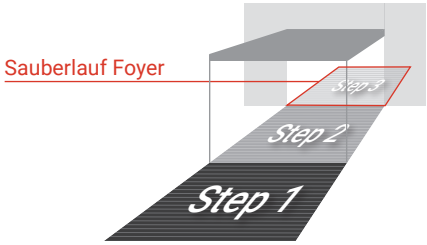

Roll width	Back	Type of production	Top layer	Pile weight	Total weight	Total height
2050 mm	vinyl	Tufting 5/32“	100 % Polyamide ECONYL	750 g/m²	3950 g/m²	9.0 mm

1. Doormats reduce costs for cleaning
Thorough removal of residual wetness and fine dirt reduces cleaning costs still further.

2. Conservation of value of bordering floor coverings
Doormats protect effectively bordering floor coverings from damage – this helps to maintain value and avoids replacement investments.

3. Avoiding risk of accident
Residual wetness is absorbed by doormats. This prevents from slip hazard by wetness.

4. Improve hygienic standards
Reduced dirt from outside affect positively the hygienic conditions in the building.

5. Sound insulation
Doormats reduce impact sound which results in a reduced noise emision (noise load).

Additional features:

Antistatic ISO 6356 | good | Anti-slip property (EN 13893) | suitable for public properties 33

Fire protection

Bfl-s1

EN 14041
(except for loosely lying mats and bordered carpets)

All dimensions are approximate measures. The Sauberlauf carpets only have conditional dimensional stability when layed loosely. On rare occasions durable pile shifting could occour, so called shading. The reason is neither the construction nor the material and the product remains fully mission capable. Therefor no warranty is granted for shading.

PUREDESIGN BY ARWEI®

Colours:

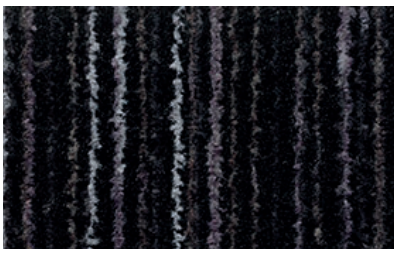
black magic

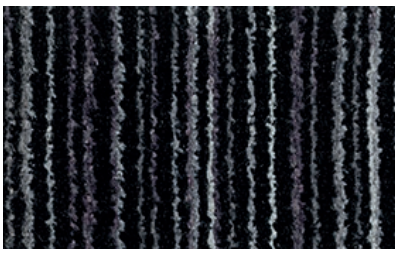
silver shadow

matrix

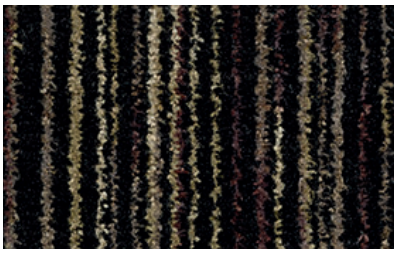
desperado

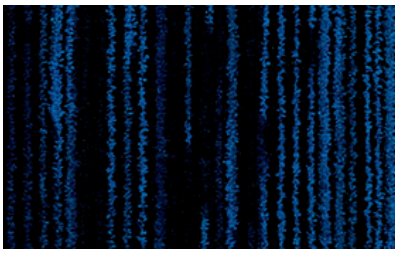
blue velvet

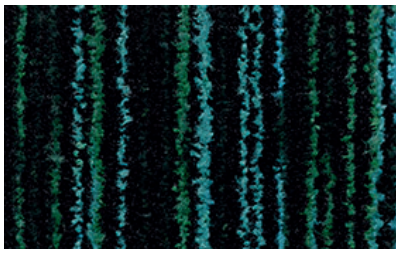
blue lagoon

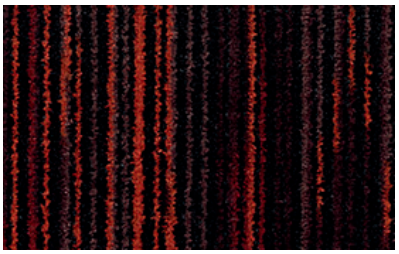
volcano

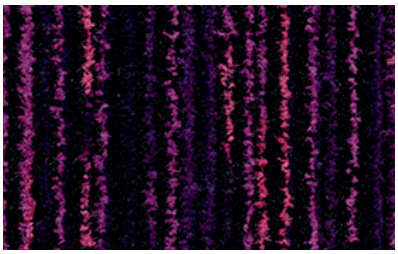
colour purple

Colours not true to original

Constructional and material changes in the course of further product development reserved. All dimensions are standard values without considering production engineeringrelated tolerances. They are based on our experience and testing. The variety of associated materials and working conditions that occur on jobsites are not checked in detail and cannot be influenced by us. The quality of your work depends on your own professional judgment and product usage. If in doubt of any application recommendation or instruction, conduct a small test or obtain technical advice. With the publication of this product data sheet invalidates all previous product information. The respective updated version of this datasheet can be found on our Homepage under www.arwei.de.

ARWEI-Bauzubehör GmbH | Kalteiche-Ring 48 | D-35708 Haiger | Tel.: +49 (0) 2773 91788-0 | Fax: +49 (0) 2773 91788-50 | eMail: info@arwei.de