


## ARWEI SAUBERLAUF RUBIN

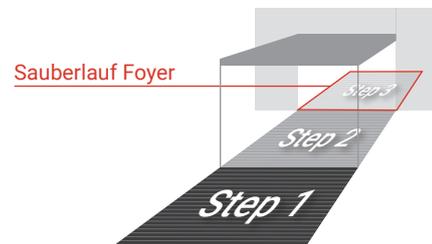

Roll width	Back	Type of production	Top layer	Pile weight	Total weight	Total height
900/1300/2000 mm	Heavy coating	Tufting 5/32"	100% Polyamide	850 g/m <sup>2</sup>	3450 g/m <sup>2</sup>	8.0 mm

### 1. Doormats reduce costs for cleaning

Thorough removal of residual wetness and fine dirt reduces cleaning costs still further.

### 2. Conservation of value of bordering floor coverings

Doormats protect effectively bordering floor coverings from damage – this helps to maintain value and avoids replacement investments.

### 3. Avoiding risk of accident

Residual wetness is absorbed by doormats. This prevents from slip hazard by wetness.

### 4. Improve hygienic standards

Reduced dirt from outside affect positively the hygienic conditions in the building.

### 5. Sound insulation

Doormats reduce impact sound which results in a reduced noise emission (noise load).

#### Additional features:



Antistatic



suitable for  
chair rolls



suitable for  
stairs



Cutting edge  
stability



high



DS  
(EN 13893)



suitable for public  
properties 32

#### Fire protection:




Cfl-s1



EN 14041  
(only roles)

All dimensions are approximate measures. The Sauberlauf carpets only have conditional dimensional stability when layed loosely. On rare occasions durable pile shifting could occur, so called shading. The reason is neither the construction nor the material and the product remains fully mission capable. Therefore no warranty is granted for shading.


## Colours:

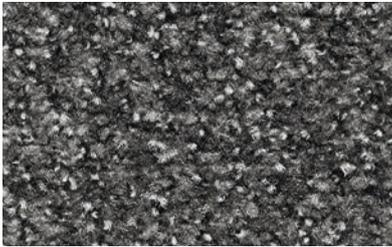

grey



brown

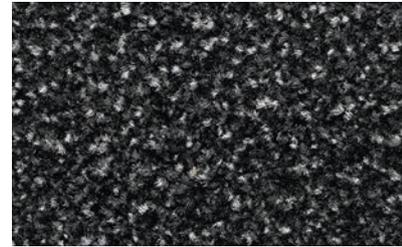

anthracite

Colours not true to original

---

Constructional and material changes in the course of further product development reserved. All dimensions are standard values without considering production engineering-related tolerances. They are based on our experience and testing. The variety of associated materials and working conditions that occur on jobsites are not checked in detail and cannot be influenced by us. The quality of your work depends on your own professional judgment and product usage. If in doubt of any application recommendation or instruction, conduct a small test or obtain technical advice. With the publication of this product data sheet invalidates all previous product information. The respective updated version of this datasheet can be found on our Homepage under [www.arwei.de](http://www.arwei.de).