

## ARWEI-PREMIUM-REINSTREIFER DATA SHEET PORTAL GCB 17

-  Static point loading up to 3,0 t per 80 cm<sup>2</sup>
-  Interior and roofed exterior
-  Exterior
-  Suitable for wheelchairs
-  Coarse dirt absorption
-  Rollable


### Recommended for:

-  Private Homes
-  Office buildings
-  Schools

Height	Bar distance	Profile	Walking Area	Weight per m <sup>2</sup>
17 mm	4 / 6 mm	Aluminum	Rubber, Cassette Brush	approx. 13,8 kg (with 6 mm bar spacing)

### System Design

- 1 Rubber
- 2 ARWEI special connector, without cable connections
- 3 ARWEI-Cassette Brush
- 4 Aluminum profile
- 5 Scratching Edge

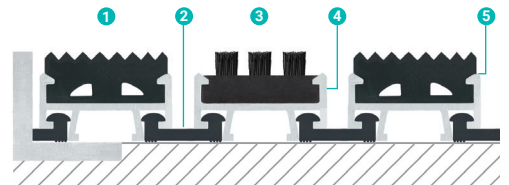

### Characteristics

- High stability up to 3000 kg per 80 cm<sup>2</sup> static point load

### Advantages

- ARWEI-Premium-Reinstreifer is manufactured as a modular system. Every single part can be replaced easily on the spot.
- The rubber profiles and the cassette brushes are fixed in a covered manner to prevent slipping sideways.
- The special profile geometry of the ARWEI Reinstreifer allows for high strain, for example for driving over with wheel chairs and trolleys.

## Tender specifications: Portal GCB 17

High quality, especially wear-resistant entrance mat, improved absorption of coarse dirt

**Application:** Indoor and roofed exterior; normal up to extremely strong frequency, suitable for trolley and wheelchairs, overall laying, Static point loading up to 3000 kg per 80 cm<sup>2</sup>

**Stripe profile:** aluminum, with scratching edge, sound insulated

**Cleaning stripes:** Rubber and cassette brush alternating

**Rubber profiles:** serrated lengthways; high quality material mix, colour black; slip resistance R 9 according to DIN 51130

**Cassette brush:** with bristle bundles arranged parallel to one another, colour black, slip resistance R 12 according to DIN 51130

**Connection:** ARWEI Special Connectors; therefore easily to roll up, high slip resistance by anti-slip function; modular construction – no wire or cable connections-, each part can easily be replaced on the spot

**Height:** 17 mm

**Bar distance:** 4 or 6 mm

Angle frames in 20 x 20 x 3 mm are available in aluminum, brass or stainless steel.