













ARWEI-PREMIUM-REINSTREIFER DATA SHEET PORTAL SGCB 17

-  Static point loading up to 7,3 t per 80 cm²
-  Interior and roofed exterior
-  Exterior
-  Suitable for wheelchairs
-  Coarse dirt absorption
-  Rollable
-  Suitable for heavy load


Recommended for:

-  Private Homes
-  Office buildings
-  Schools
-  Shopping centres
-  Public and fairground halls

Height	Bar distance	Profile	Walking Area	Weight per m ²
17 mm	4 / 6 mm	Aluminum	Rubber, Cassette Brush	approx. 16,3 kg (with 6 mm bar spacing)

System Design

- 1 Rubber
- 2 ARWEI special connector, without cable connections
- 3 ARWEI-Cassette Brush
- 4 Aluminum profile
- 5 Scratching Edge

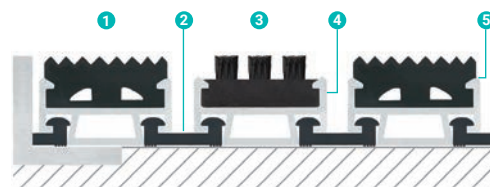

Characteristics

- Extremely high stability up to 7300 kg per 80 cm² static point load

Advantages

- ARWEI-Premium-Reinstreifer is manufactured as a modular system.
Every single part can be replaced easily on the spot.
- The rubber profiles and cassette brush are fixed in a covered manner to prevent slipping sideways.
- The special profile geometry of the ARWEI Reinstreifer allows for high strain. The Reinstreifer is drivable

Tender specifications: Portal SGCB 17

High quality, especially wear-resistant entrance mat, improved absorption of coarse dirt

Application: Indoor and roofed exterior; normal up to extremely strong frequency, drivable with trolleys, pallet trucks, cars, etc.; suitable for wheelchairs, overall laying, Static point loading up to 7300 kg per 80 cm²

Stripe profile: aluminum, with scratching edge, sound insulated

Cleaning pads: Rubber and cassette brush alternating

Rubber profiles: serrated lengthways; aluminum profile edges covered, high quality material mix, colour black; slip resistance R 9 according to DIN 51130


Cassette brush: with bristle bundles arranged parallel to one another, colour black, slip resistance R 12 according to DIN 51130

Connection: ARWEI Special Connectors; therefore easily to roll up, high slip resistance by anti-slip function; modular construction – no wire or cable connections-, each part can easily be replaced on the spot

Height: 17 mm

Bar distance: 4 or 6 mm

Angle frames in 20 x 20 x 3 mm are available in aluminum, brass or stainless steel.

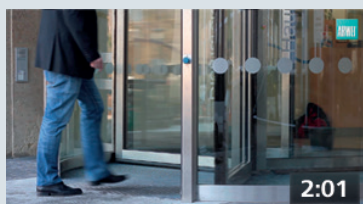

ARWEI REINSTREIFER
IN ACTION.

www.youtube.com/arweitv



You Tube

Constructional and material changes in the course of further product development reserved. All dimensions are standard values without considering production engineering-related tolerances. They are based on our experience and testing. The variety of associated materials and working conditions that occur on jobsites are not checked in detail and cannot be influenced by us. The quality of your work depends on your own professional judgment and product usage. If in doubt of any application recommendation or instruction, conduct a small test or obtain technical advice. With the publication of this product data sheet invalidates all previous product information. The respective updated version of this datasheet can be found on our Homepage under www.arwei.de.