









## ARWEI-PREMIUM-REINSTREIFER DATA SHEET PORTAL SN 27 (F)

-  Static point loading up to 9,5 t per 80 cm<sup>2</sup>
-  Interior and roofed exterior
-  Suitable for wheelchairs
-  Suitable for heavy load
-  Rollable


### Recommended for:

-  Private Homes
-  Office buildings
-  Kindergartens
-  Schools
-  Hospitals
-  Shopping centres
-  Public and fairground halls
-  C<sub>en</sub>s1

| Height | Bar distance | Profile  | Walking Area | Weight per m <sup>2</sup>               |
|--------|--------------|----------|--------------|---|
| 27 mm  | 4 / 6 mm     | Aluminum | Needle felt  | approx. 17,5 kg (with 6 mm bar spacing) |

### System Design

- 1 Needle felt
- 2 Aluminum profile
- 3 ARWEI special connector, without cable connections
- 4 Scratching Edge

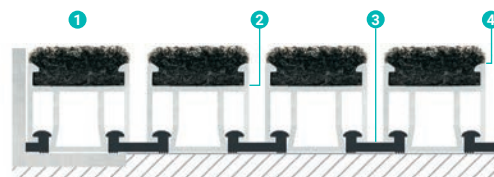

### Characteristics

- Extreme high stability up to 9500 kg per 80 cm<sup>2</sup> static point load
- The ARWEI „Special Needle Felt“ is certified „TÜV PROFiCERT-product Interior PREMIUM“

### Advantages

- ARWEI-Premium-Reinstreifer is manufactured as a modular system. Every single part can be replaced easily on the spot.
- ARWEI needle felt convinces with an excellent cleaning effect, a duplicated life time versus conventional sling ware, a minimum of getting dirty itself and a high wear-resistance. 4-5 mm compact fabric top layer.
- The needle felt is fixed in a covered manner to prevent slipping sideways.
- The special profile geometry of the ARWEI Reinstreifer allows for high strain. The Reinstreifer is even drivable with loaded electronic pallet trucks.
- The ARWEI „Special Needle Felt“ is certified „TÜV PROFiCERT-product Interior PREMIUM“ and is therewith a proven product for emission requirements by DGNB for the criteria „ENV1.2 risks for local environment“.

### Standard Colours

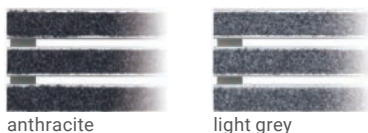


Illustration of colors not true to original.  
On request you receive original samples promptly.

## Tender specifications: Portal SN 27 (F)

High quality, especially wear-resistant entrance mat

**Application:** Indoor and roofed exterior; normal up to extremely strong frequency, drivable with trolleys, pallet trucks, cars, etc.; suitable for wheelchairs, overall laying, Static point loading up to 9500 kg per 80 cm²

**Stripe profile:** aluminum, with scratching edge, sound insulated

**Needle felt special ground:** 100 % PP; pole density 2400 g/m²; completely needled; no sling ware, minimum contamination; extremely wear-resistant; is fixed in a covered manner to prevent slipping sideways; needle felt can be substituted subsequently; colours anthracite, light grey; special colours on demand; slip resistance R 11 according to DIN 51130

**ARWEI „Special Needle Felt“ is certified „TÜV PROFICERT-product Interior PREMIUM“**

AgBB; A+ (Émissions dans l'air intérieur); Belgian VOC-regulation; LEED v4 (outside North America); BREEAM Exemplary Level; Finnish M1-Klassifizierung; GUT / PRODIS; DE-UZ 128 (Blue Angel); EU-Ecolabel; Austrich env. label UZ 35; CAM Italy; MVV TB Anhang 8+9 / ABG



**Fire classification according to DIN EN 13501-1:2010: C<sub>fl</sub>-s1**

**Connection:** ARWEI Special Connectors; therefore easily to roll up, high slip resistance by anti-slip function; modular construction – no wire or cable connections -, each part can easily be replaced on the spot

**Height:** 27 mm

**Bar distance 4 mm:** needle felt walking area 72 cm each m of walking depth

**Bar distance 6 mm:** needle felt walking area 68 cm each m of walking depth

At a bar distance of 4 mm also appropriate for automatically revolving doors according to DIN 18650-1.

Angle frames in 30 x 30 x 3 mm are available in aluminium, brass or stainless steel.