








## ARWEI-COMPACT-REINSTREIFER DATA SHEET PORTAL SR 17

-  Static point loading up to 10,0 t per 80 cm<sup>2</sup>
-  Interior and roofed exterior
-  Suitable for wheelchairs
-  Suitable for heavy load
-  Rollable


### Recommended for:

-  Private Homes
-  Office buildings
-  Kindergartens
-  Schools
-  Hospitals
-  Shopping centres
-  Public and fairground halls

Height	Bar distance	Profile	Walking Area	Weight per m <sup>2</sup>
17 mm	4 / 6 mm	Aluminum	Rips	approx. 9,8 kg (with 6 mm bar spacing)

### System Design

- 1 Rips
- 2 Aluminum profile
- 3 ARWEI special connector, without cable connections
- 4 Scratching Edge

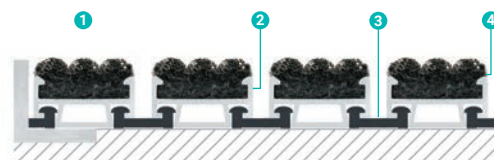

### Characteristics

- Extremely high stability up to 10000 kg per 80 cm<sup>2</sup> static point load

### Advantages

- ARWEI-Compact-Reinstreifer is manufactured as a modular system.  
Every single part can be replaced easily on the spot.
- The rip stripe is fixed in a covered manner to prevent slipping sideways.
- The special profile geometry of the ARWEI Reinstreifer allows for high strain. The Reinstreifer is drivable.

## Standard Colours



Illustration of colors not true to original.  
On request you receive original samples promptly.

## Tender specifications: Portal SR 17

High quality, especially wear-resistant entrance mat

**Application:** Indoor and roofed exterior; normal up to extremely strong frequency, drivable for trolleys, pallet trucks, cars, etc.; suitable for wheelchairs, overall laying, Static point loading up to 10000 kg per 80 cm²

**Stripe profile:** aluminium, with scratching edges, sound insulated

**Walking area:** Rips, 100 % PP; is fixed in a covered manner to prevent slipping sideways; can be substituted subsequently; colours anthracite, light grey, dark brown, red, coconut; slip resistance R11 according to DIN 51130

**Connection:** ARWEI Special Connectors; therefore easily to roll up, high slip resistance by anti-slip function; modular construction – no wire or cable connections -, each part can easily be replaced on the spot

**Height:** approx. 17 mm

**Bar distance 4 mm:** walking area 72 cm each m of walking depth

**Bar distance 6 mm:** walking area 68 cm each m of walking depth

At a bar distance of 4 mm also appropriate for automatically revolving doors according to DIN 18650-1.

Angle frames in 20 x 20 x 3 mm are available in aluminum, brass or stainless steel.



ARWEI REINSTREIFER  
IN ACTION.

[www.youtube.com/arweivt](https://www.youtube.com/arweivt)



You Tube

Constructional and material changes in the course of further product development reserved. All dimensions are standard values without considering production engineering-related tolerances. They are based on our experience and testing. The variety of associated materials and working conditions that occur on jobsites are not checked in detail and cannot be influenced by us. The quality of your work depends on your own professional judgment and product usage. If in doubt of any application recommendation or instruction, conduct a small test or obtain technical advice. With the publication of this product data sheet invalidates all previous product information. The respective updated version of this datasheet can be found on our Homepage under [www.arwei.de](http://www.arwei.de).