







## ARWEI-KOMPAKT-REINSTREIFER DATA SHEET PORTAL SRB 23 MIX 2/1

-  Static point loading up to 13,0 t per 80 cm<sup>2</sup>
-  Interior and roofed exterior
-  Suitable for wheelchairs
-  Coarse dirt absorption
-  Suitable for heavy load
-  Rollable


### Recommended for:

-  Private Homes
-  Office buildings
-  Shopping centres
-  Public and fairground halls

Height	Bar distance	Profile	Walking Area	Weight per m <sup>2</sup>
23 mm	4 / 6 mm	Aluminum	Rips, Three-way Brush	approx. 15,6 kg (with 6 mm bar spacing)

### System Design

- 1 Rips
- 2 ARWEI Three-way Brush
- 3 ARWEI special connector, without cable connections
- 4 Aluminum profile
- 5 Scratching Edge

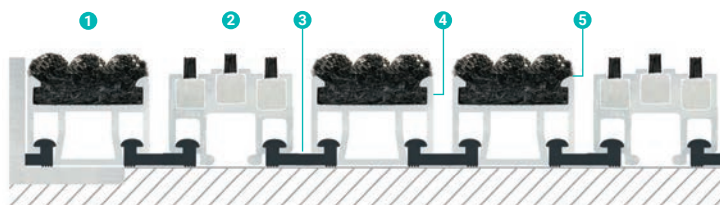

### Characteristics

- Extremely high stability up to 13000 kg per 80 cm<sup>2</sup> static point load

### Advantages

- ARWEI-Compact-Reinstreifer is manufactured as a modular system.  
Every single part can be replaced easily on the spot.
- The rip stripe and the 3-way brushes are fixed in a covered manner to prevent slipping sideways.
- The 3-way brushes on different levels improve the collection of coarse dirt.
- The special profile geometry of the ARWEI Reinstreifer allows for high strain. The Reinstreifer is drivable.

## Standard Colours



Illustration of colors not true to original.  
On request you receive original samples promptly.  
It's about rips colours. Brushes only available in black.

## Tender specifications: Portal SRB 23 Mix 2/1

High quality, especially wear-resistant entrance mat, improved absorption of coarse dirt

**Application:** Indoor and roofed exterior; normal up to extremely strong frequency, drivable for trolleys, pallet trucks, cars, etc.; suitable for wheelchairs, overall laying, Static point loading up to 13000 kg per 80 cm²

**Stripe profile:** aluminium, with scratching edges, sound insulated

**Cleaning stripes:** Rips and brush, mix 2/1 (minimum 32 brush profiles each metre of walking depth)

**Walking area:** Rips, 100 % PP; is fixed in a covered manner to prevent slipping sideways; can be substituted subsequently; colours anthracite, light grey, dark brown, red, coconut; slip resistance R11 according to DIN 51130

**Brush:** ARWEI three-way brush; brushes on different levels for an improved absorption of coarse dirt, sound insulating, colour black, slip resistance R 13 according to DIN 51130

**Connection:** ARWEI Special Connectors; therefore easily to roll up, high slip resistance by anti-slip function; modular construction – no wire or cable connections -, each part can easily be replaced on the spot

**Height:** 23 mm

**Bar distance 4 mm:** 48 cm rips walking area and 34 brush profiles each m of walking depth

**Bar distance 6 mm:** 46 cm rips walking area and 32 brush profiles each m of walking depth

Angle frames in 25 x 25 x 3 mm are available in aluminum, brass or stainless steel.



ARWEI REINSTREIFER  
IN ACTION.

[www.youtube.com/arweityt](https://www.youtube.com/arweityt)



You Tube

Constructional and material changes in the course of further product development reserved. All dimensions are standard values without considering production engineering-related tolerances. They are based on our experience and testing. The variety of associated materials and working conditions that occur on jobsites are not checked in detail and cannot be influenced by us. The quality of your work depends on your own professional judgment and product usage. If in doubt of any application recommendation or instruction, conduct a small test or obtain technical advice. With the publication of this product data sheet invalidates all previous product information. The respective updated version of this datasheet can be found on our Homepage under [www.arwei.de](http://www.arwei.de).