






-  Static point loading up to 0,8 t per 80 cm²
-  High collection volume up to 8,6 litres per m²
-  Interior and roofed exterior
-  Suitable for wheelchairs
-  Rinsing

 Rollable


Recommended for:

-  Private Homes
-  Office buildings
-  Kindergartens
-  Schools
-  Hospitals

Height	Bar distance	Profile	Walking Area	Weight per m ²
22 mm	3 / 5 mm	Aluminum	Rips	approx. 10,5 kg (with 5 mm bar spacing)

System Design

- 1 Rips
- 2 Aluminum profile
- 3 ARWEI special connector, without cable connections

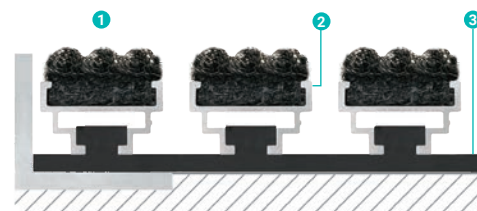

Characteristics

- High stability up to 800 kg per 80 cm² static point load
- V-profile form with increased solid dirt collection of 8,6 litres per m²

Advantages

- ARWEI-Compact-Reinstreifer is manufactured as a modular system. Every single part can be replaced easily on the spot.
- The profiles are rear-ventilated. The air can circulate. The Reinstreifer dries quickly and does not smell.
- V-shape profiles collect almost 30-100% more dirt than box-type systems. The result is: longer cleaning intervals and reduced cleaning costs.
- The rip stripe is fixed in a covered manner to prevent slipping sideways.
- The special profile geometry of the ARWEI Pure Design enables a high strain. The Reinstreifer is suitable for wheel chairs.

Standard Colours



Illustration of colors not true to original.
On request you receive original samples promptly.

Tender specifications: Tradition R 22

High quality, especially wear-resistant entrance mat

Application: Indoor and exterior; normal up to extremely strong frequency, suitable for trolleys and wheelchairs, overall laying, Static point loading up to 800 kg per 80 cm²

Stripe supporting profile: aluminium, V-shaped; 3 mm ground clearance, uncoupled, sound-absorbing, rinsing, rear ventilated

Walking area: Rips, 100 % PP; is fixed in a covered manner to prevent slipping sideways; can be substituted subsequently; colours anthracite, light grey, dark brown, red, coconut; slip resistance R11 according to DIN 51130

Connection: ARWEI Special Connectors (patented in 1977); therefore easily to roll up, modular construction – no wire or cable connections –, each part can easily be replaced on the spot

Height: 22 mm

Bar distance 3 mm: Coarse dirt absorption 7,7 l / m², needle felt walking area 77 cm each m of walking depth

Bar distance 5 mm: Coarse dirt absorption 8,6 l / m², needle felt walking area 72 cm each m of walking depth

At a bar distance of 3 mm also appropriate for automatically revolving doors according to DIN 18650-1.

Angle frames in 25 x 25 x 3 mm are available in aluminum, brass or stainless steel.



ARWEI REINSTREIFER
IN ACTION.

www.youtube.com/arweitv



You Tube

Constructional and material changes in the course of further product development reserved. All dimensions are standard values without considering production engineering-related tolerances. They are based on our experience and testing. The variety of associated materials and working conditions that occur on jobsites are not checked in detail and cannot be influenced by us. The quality of your work depends on your own professional judgment and product usage. If in doubt of any application recommendation or instruction, conduct a small test or obtain technical advice. With the publication of this product data sheet invalidates all previous product information. The respective updated version of this datasheet can be found on our Homepage under www.arwei.de.