CLEAN IDEAS WITH SYSTEM

PUREDESIGN BY ARWEI®

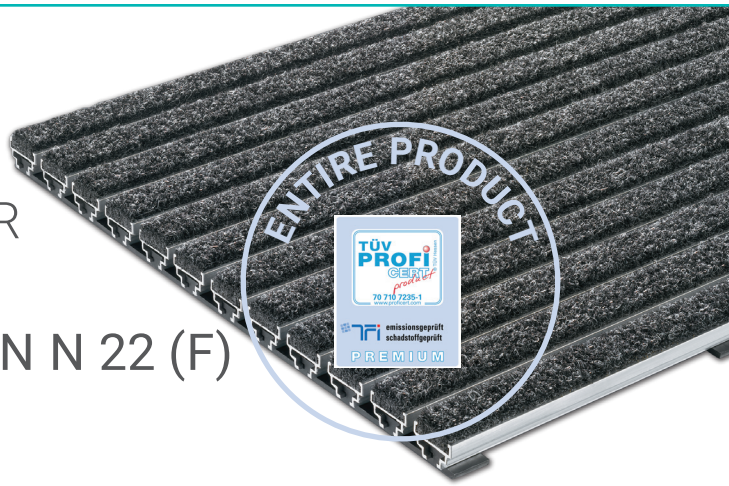

ARWEI-PREMIUM-REINSTREIFER

TÜV PROFiCERT-product Interior PREMIUM

DATA SHEET PORTAL TRADITION N 22 (F)

- Static point loading up to 0,8 t per 80 cm²
- High collection volume up to 8,6 litres per m²
- Interior and roofed exterior
- Suitable for wheelchairs
- Rinsing
- Emission standards met
- Rollable

Recommended for:

Private Homes · Office buildings · Kindergartens · Schools · Hospitals

Height	Bar distance	Profile	Walking Area	Weight per m²
22 mm	3 / 5 mm	Aluminum	Needle felt	approx. 10,5 kg (with 5 mm bar spacing)

System Design

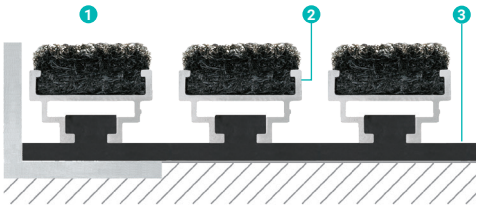

1. Needle felt
2. Aluminum profile
3. ARWEI special connector, without cable connections

Characteristics

- High stability up to 800 kg per 80 cm² static point load
- V-profile form with increased solid dirt collection of 8,6 litres per m²
- The ARWEI-Premium-Reinstreifer is certified „TÜV PROFiCERT-product Interior PREMIUM“

Advantages

- ARWEI-Premium-Reinstreifer is manufactured as a modular system. Every single part can be replaced easily on the spot.
- The profiles are rear-ventilationed. The air can circulate. The Reinstreifer dries quickly and does not smell.
- V-shape profiles collect almost 30-100% more dirt than box-type systems. The result is: longer cleaning intervals and reduced cleaning costs.
- ARWEI needle felt convinces with an excellent cleaning effect, a duplicated life time versus conventional sling ware, a minimum of getting dirty itself and a high wear-resistance. 4-5 mm compact fabric top layer.
- The needle felt is fixed in a covered manner to prevent slipping sideways.
- The special profile geometry of the ARWEI Reinstreifer allows for high strain, for example for driving over with wheel chairs.
- The ARWEI-Premium-Reinstreifer is certified „TÜV PROFiCERT-product Interior PREMIUM“ and is therewith a proven product for emission requirements by DGNB for the criteria „ENV1.2 risks for local environment“.

Standard Colours


anthracite


light grey

Illustration of colors not true to original.
On request you receive original samples promptly.

Tender specifications: Tradition N 22 (F)

High quality, especially wear-resistant entrance mat

Application: Indoor and roofed exterior; normal up to extremely strong frequency, suitable for trolley, overall laying, Static point loading up to 800 kg per 80 cm²

Sustainability: When using certified ARWEI-Reinstreifer, the rules and limits for emission standards are complied with in accordance with building guidelines. Certification according to the criteria of „TÜV PROFiCERT-product Interior PREMIUM“ means that the emission limits of various international certificates are complied with.

Stripe supporting profile: aluminium, V-shaped; 3 mm ground clearance, uncoupled, sound-absorbing, rinsing, rear ventilated

Needle felt special ground: 100 % PP; pole density 2400 g/m²; completely needled; no sling ware, minimum contamination; extremely wear-resistant; is fixed in a covered manner to prevent slipping sideways; needle felt can be substituted subsequently; colours anthracite, light grey; special colours on demand;
slip resistance R 11 according to DIN 51130

ARWEI-Premium-Reinstreifer is certified „TÜV PROFiCERT-product Interior PREMIUM“
AgBB; A+ (Émissions dans l'air intérieur); Belgian VOC-regulation; LEED v4 (outside North America); BREEAM Exemplary Level; Finnish M1-Klassifzierung; GUT / PRODIS; DE-UZ 128 (Blue Angel); EU-Ecolabel; Austrich env. label UZ 35; CAM Italy; MVV TB Anhang 8+9 / ABG

Colour fastness
Rubbing fastness (DIN EN ISO 105-X12) dry: Grade: 3-4 (good) wet: 4-5 (very good)
Water fastness (DIN EN ISO 105-E01) Grade: 4-5 (very good)
Light fastness (DIN EN ISO 105-B02) Grade: 7 (good)

Fire classification according to DIN EN 13501-1:2010: C_{fl}-s1

Connection: ARWEI Special Connectors; therefore easily to roll up, high slip resistance by anti-slip function; modular construction – no wire or cable connections -, each part can easily be replaced on the spot

Height:	22 mm
Bar distance 3 mm:	Coarse dirt absorption 7,7 l / m²; needle felt walking area 77 cm each m of walking depth
Bar distance 5 mm:	Coarse dirt absorption 8,6 l / m²; needle felt walking area 72 cm each m of walking depth

At a bar distance of 3 mm also appropriate for automatically revolving doors according to DIN 18650-1.

Angle frames in 25 x 25 x 3 mm are available in aluminium, brass or stainless steel.

Mitglied der DGNB

TÜVNORD DIN EN ISO 9001

MADE IN GERMANY

Constructional and material changes in the course of further product development reserved. All dimensions are standard values without considering production engineering-related tolerances. They are based on our experience and testing. The variety of associated materials and working conditions that occur on jobsites are not checked in detail and cannot be influenced by us. The quality of your work depends on your own professional judgment and product usage. If in doubt of any application recommendation or instruction, conduct a small test or obtain technical advice. With the publication of this product data sheet invalidates all previous product information. The respective updated version of this datasheet can be found on our Homepage under www.arwei.de.

ARWEI-Bauzubehör GmbH | Kalteiche-Ring 48 | D-35708 Haiger | Tel.: +49 (0) 2773 91788-0 | Fax: +49 (0) 2773 91788-50 | eMail: info@arwei.de www.arwei.de

Stand 12.2025